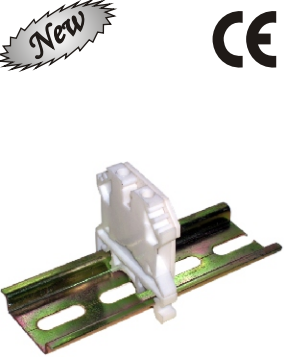



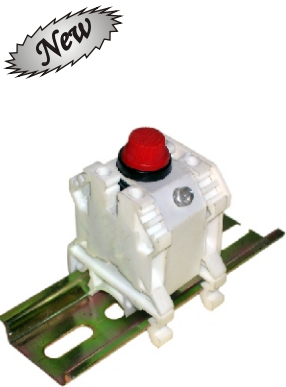



MIMIC Control Connector Range

MIMIC	Dimension	Code	Salient features
<p><i>New</i></p>  <p>CE</p>	 <p>SIZE : H-43 x W-4 mm x D-43</p>		<p>Control Connector</p> <p>Suitable for 0.5 – 4mm² Rating 750 V – 32Amp. Standard – IEC/EN60947-7-1:2002 Suitable for G type & C type DIN rail.</p>
<p><i>New</i></p> 	 <p>SIZE : H-46 x W-8 mm x D-46</p>		<p>Indicating Connector</p> <p>When voltage is applied LED indicator will glow. Separate neutral to be provided Inbuilt SIVP Will not glow below 36V for 230V AC supply. Can be used for continuous indication for important control point</p>
<p><i>New</i></p> 	 <p>SIZE : H-49 x W-24 mm x D-49</p>		<p>Fuse blown indicating Connector</p> <p>Built-in glass fuse will give protection in case of short circuit. Indicator will glow when fuse is blown. Also available with flashing Indication.</p>