



MIMIC 30.5 Cutout square body **Standard** lamp

MIMIC



Dimension

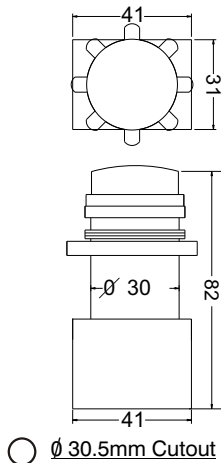

Salient features

Available voltage:
 6,12,24,48,110,240,415 VAC
 6,12,24,48,110,220 VDC
 6,12,24,48,110,220 VAC/DC

Rugged design

Proven performance

0.5 Watt

Also available Green steady Red Flasher or vice versa or any combination with any two colour.

Adjustable time 0 to 180 sec.

Smooth bright glow
 180° viewing angle

Code

L/STD 30	Red, Green, Amber
L/STD 30	White, Blue
BIL/STD 30	Bicolour lamp Red, Green, Amber
TRL/STD 30	Tricolour lamp Red, Green, Amber
FL/STD 30	Flasher lamp Red, Green, Amber
RL/STD 30	Relay lamp with single change over contact
RL/STD 30	Relay lamp with double change over contact
← S+FL/STD 30	Steady + Flasher lamp Red, Green, Amber
← TL/STD 30	Timer lamp with single change over contact
← TL/STD 30	Timer lamp with double change over contact
OCL/STD 30	Open collector lamp with single output transistor
OCL/STD 30	Open collector lamp with double output transistor
BL/STD 30	Buzzer cum Flasher lamp Red, Green, Amber

TRUTH TABLE FOR "AND LAMP"

INPUT - 1	INPUT - 2	INDICATION	RELAY	← LOL/STD 30	Logic 'AND' lamp with single change over contact
✓	✗	✗	Denergised	LOL/STD 30	Logic 'AND' lamp with double change over contact
✗	✓	✗	Denergised		
✓	✓	✓	Energised		

TRUTH TABLE FOR "OR LAMP"

INPUT - 1	INPUT - 2	INDICATION	RELAY	← LOL/STD 30	Logic 'OR' lamp with single change over contact
✓	✗	✓	Energised	LOL/STD 30	Logic 'OR' lamp with double change over contact
✗	✓	✓	Energised		
✓	✓	✓	Energised		

For 110 VDC, 220 VDC

For 415 VAC

Lamp with fire retardant body